


## How to Use the Voltage Valet™ Converter

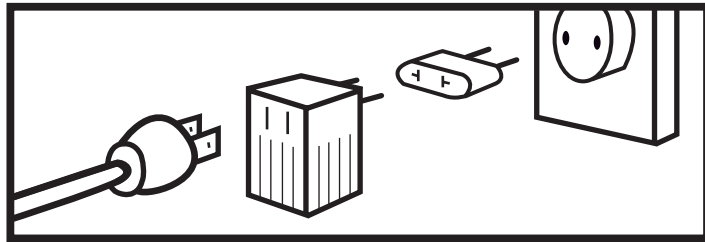

1. Select the proper Voltage Valet converter for use with your appliance. Refer to the converter usage description for appliance listings.
2. Insert your appliance plug into the converter.
3. Plug the converter into the wall outlet and turn on appliance. If an adaptor plug (see section on adaptor plugs) is necessary, simply select the appropriate plug, snap it onto the converter and then plug the unit into the wall outlet.

### 50 watt Converter

**Model V5**, for use with 110-120 volt appliances rated up to 50 watts maximum. Use with appliances such as battery chargers, camcorders, CD/MP3 players, cell phones, contact lens sterilizers, digital cameras, electric shavers, oral hygiene devices, radios and sound machines.

### 1600 watt & 2000 watt\* Converter

**Model V16**, for use ONLY with 110-120 volt NON ELECTRONIC HEATING APPLIANCES\*\* rated up to 1600 watts maximum. Use with appliances such as clothes steamers, coffee makers, electric blankets, electric curlers, food/bottle warmers, hair dryers, heating pads, immersion heaters, irons and incandescent lamps.

\* **Model V20** same as above but rated up to 2000 watts maximum.

\*\***IMPORTANT:** Electronically controlled coffee makers, curling irons, hair straighteners, electric blankets, irons, etc., that use digital timing/temperature circuits or have auto-start/auto shutoff features may be damaged if used with this converter.

### 50 watt/1600 watt Combination Converter

**Model VCC**, combines the 50 watt and 1600 watt converters into one convenient unit. Wattage selector switch allows use with the appliances listed for the model V5 and the model V16 converters.



Use with motorized and electronic appliances rated up to 50 watts MAXIMUM\* such as:

Battery Chargers  
Camcorders  
CD/MP3/DVD Players  
Cell Phones  
Contact Lens Sterilizers  
Digital Cameras  
Electric Shavers  
Oral Hygiene Devices  
Radios  
Sound Machines

Use with NON-ELECTRONIC appliances rated up to 1600 watts MAXIMUM\* such as:

Clothes Steamers  
Coffee Makers  
Electric Blankets  
Electric Curlers  
Food/Bottle Warmers  
Hair Dryers  
Heating Pads  
Immersion Heaters  
Irons  
Incandescent lamps

**CAUTION:** Each Voltage Valet™ foreign electricity converter is designed for use with the product types listed above. THEY CANNOT BE USED INTERCHANGEABLY. Also, converters should never be used with clocks, computers, high fidelity equipment, hooded hair dryers, medical equipment, projectors, television sets, typewriters, or any permanently installed equipment. Voltage Valet converters will not work with direct current (DC). THEY ARE NOT DESIGNED FOR CONTINUOUS USE.

## Important – Please read...

- Before using your Voltage Valet™ converter, check to see if the electrical outlet is 110-120 volts or 220-240 volts. Your converter will not work in a 110-120 volt outlet, and both it and your appliance may be seriously damaged or ruined if used incorrectly.
- All Voltage Valet™ converters are equipped with an internal shut-off and reset system. When it becomes overworked it will automatically shut itself off. Should this occur, remove the converter from the outlet and allow a short period for it to cool down and reset itself.
- Some appliances may operate a bit slower when used in foreign countries. This is normal and will not harm your appliances.
- At times there may be a low humming sound in the converter – this is normal.
- Remove your Voltage Valet™ converter from the wall outlet when not in use.

We guarantee each new converter to be free from defects in material or workmanship and to perform under normal use and service. This guarantee shall run for a period of one year from the date of purchase, and obligations under this guarantee are limited to remedying any defect or replacing any defective part and shall be effective only if the defective unit is returned to us within 12 months after purchase. Damage due to abuse or misuse is not covered by this guarantee. We shall not be responsible for any other loss or damage that may arise through the use by a purchaser or others of this device, and the purchaser assumes such responsibility and will hold Hybrinetics, Inc. harmless in respect to all such loss or damage.


**Important: This is a factory direct warranty, valid in North America only. Do not return defectives to your retailer. All defectives must be returned to the factory accompanied by a sales receipt with the original date of purchase. For more information please call our toll free number: (800) 247-6900.**

**Voltage Valet Division  
Hybrinetics, Inc.**  
225 Sutton Place  
Santa Rosa, CA 95407

E-mail: [hybrinet@voltagevalet.com](mailto:hybrinet@voltagevalet.com)  
Web Site: [www.voltagevalet.com](http://www.voltagevalet.com)  
©2007 HYBRINETICS, INC.

## Adaptor Plugs

Electrical wall outlets around the world differ in shape, assortment, and arrangement of outlet holes. The most common outlet requires two round pins (Continental Europe type). These round pins have been designed into all Voltage Valet™ converters. Many countries, however, use other types of outlets that require an adaptor plug. Voltage Valet™ offers six different adaptor plugs for use with voltage converters and dual voltage appliances.



**IMPORTANT NOTE:** Adaptor plugs DO NOT convert voltage. They only enable you to plug your converter or dual voltage appliance into a foreign wall outlet.

## Country List

Below is a list of popularly traveled countries and the Voltage Valet™ adaptor plug(s) required for each. Check the list to determine which adaptor plug(s), if any, you need to operate your voltage converter or dual voltage appliance. It is recommended that you carry all of the adaptor plugs listed for each country. **NOTE: Some countries in Continental Europe have recessed electrical outlets. Use the 'B' adaptor plug with your voltage converter to fit into these recessed outlets.**

Afghanistan B, F	Germany B	Pakistan B, F
Algeria B, F	Greece B	Paraguay B
Argentina B, C	Guatemala A	Peru A, B
Australia C	Hong Kong D, E	Philippines A, B
Austria B	Hungary B	Poland B
Bahamas A	India E, F	Portugal B
Belgium B	Indonesia B	Romania B
Bolivia A, B	Ireland D, E	Russia B
Brazil A, B	Israel B	Saudi Arabia A, B, D
Burma B, D, F	Italy B	Scotland D, E
Canada A	Japan A	Singapore B, D, F
Chile B	Jordan B, D, F	South Africa E
China B, C, D	Kenya B, D, F	Spain B
Colombia A	Korea A, B	Sri Lanka B, F
Congo, D. Rep B, F	Kuwait B, D, F	Sweden B
Costa Rica A	Lebanon B, F	Switzerland B
Czech Rep. B	Luxembourg B	Taipei A, B
Denmark B	Malaysia D	Taiwan A
Ecuador A	Mexico A	Tanzania D, F
Egypt B	Morocco B, F	Thailand A, B
England D, E	Nepal B, F	Turkey B
Ethiopia B, F	Netherlands B	Ukraine B
Fiji C	New Zealand C	U. Arab Emirates D, F
Finland B	Nigeria D, F	Uruguay B
France B	Norway B	Venezuela A
		Vietnam A, B



**Voltage Valet™**

Foreign Travel  
Voltage Converter

